

# Network Video Recorder

**QSS #22572 QSS301L-04-P4 Includes 3TB HDD**



## Key Features


- 4-channel input
- Plug & Play with 4 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- Up to 8 Megapixels resolution recording
- Support H.265/H.264 video formats
- Accurate retrieval, instant playback
- 1 SATA HDD up to 6 TB
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

# Specifications

Model	QSS301L-04-P4		
Video/Audio Input			
IP Video Input	4-ch		
Two-way Audio Input	1-ch, RCA		
Network			
Incoming Bandwidth	40Mbps		
Outgoing Bandwidth	64Mbps		
Remote Users	128		
Video/Audio Output			
HDMI/VGA Output	HDMI: 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz		
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Audio Output	1-ch, RCA		
Synchronous Playback	4-ch		
Decoding			
Compression	H.265/H.264		
Live view/ Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Capability	1 x 4K@30, 3 x 4MP@20, 4 x 1080p@25, 8 x 720p@25, 16 x D1		
Hard Disk			
SATA	1 SATA interface		
Capacity	up to 6TB for each disk		
External Interface			
Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface		
USB Interface	Rear panel : 2 x USB2.0		
PoE			
Interface	4 independent 100 Mbps PoE network interfaces		
Max Power	Max 30W for single port Max 54W in total ( 13.5W for each )		
Supported Standard	IEEE 802.3at, IEEE 802.3af		
General			

Power Supply	48V DC	
Consumption (without HDD)	$\leq 8\text{ W}$	
Working Temperature	$-10^{\circ}\text{C} \sim +55^{\circ}\text{C}$	
Working Humidity	10% ~ 90%	
Dimensions	42 × 205 × 205mm	
Weight (without HDD)	0.59kg	

## Dimensions

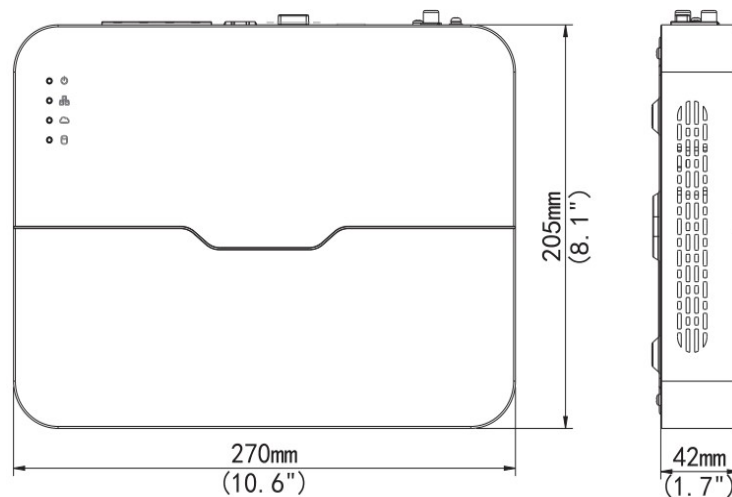

## Rear Panel

