

EZViEWER Video Management Software



Key Features


- Unified management for Cameras, DVR/NVR and storage server
- Simultaneous management of up to 256 cameras
- Support large-capacity recording, up to 32 channels' network/digital recording
- Auto device detecting for easy adding
- Support adding, configuring, and upgrading devices in batch
- Time adjusting in batch, and NTP for time sync
- Friendly user interface for easy operation
- Up to 32 live viewing in 1 screen
- Up to 3 auxiliary screens for up to 128 channels' live viewing
- Sequence live video displaying
- Provide Corridor mode window
- Recording retrieval in local PC, DVR/NVR and storage server
- Local and remote playback
- Recording plan configuration by split-period
- Synchronize up to 16 channels' playback
- PTZ controls including preset and patrol
- Various alarming event including temperature, device online/offline, motion detection and etc.

Specifications

Version	QView
Function	Description
Device Management	
Devices Supported	Max. 256 local channels and 128 cloud channels
	Max. 256 local encoding devices and 128 cloud devices
	Max. 32 decoding devices
	Max. 8 QSS Recorders storage servers
	Max. 4 QSS Streamer stream servers
Features	Auto device discovery, and adding, configuring, time adjusting in batch
Live Monitoring	
Screen Layout	1/ 4/ 5 /6 /8 /9 /10 /13 /16 /17 /25 /32 /36 split screen(s) with up to 1 sub screen Note: Max. 36 screens live view
PTZ Control	Pan, Tilt, Zoom, Preset, Patrol, 3D positioning, IR control, wiper control, heat control, snow removing Note: To realize functionality above, please refer to the product's practical capacity.
Features	Sequence display, snapshot, local record, audio, two-way talk, and instant playback
Playback	
Video Source	Recording video from DVR/NVR and QSS Recorder
Max Channels	16 (Async)/16 (Sync)
Search Type	Time/event/calendar
Export File	.ts, .mp4
Features	Recording schedule and download, snapshot, -16x~16x speed for forward and backward, audio, digital zoom
Alarm	
Type	Service alarms and device alarms
Alarm Triggering	Live view, recording, email, preset, alarm output and etc.
Features	Alarm schedule, actions setup, alarm memo, alarm info popup
E-Map	
Format	PNG/JPEG/BMP
Map Alarm	Alarm flash, search and acknowledge
Features	Hot spot, hot region, map zoom in/out, map group, eagle eye
System Requirement	
Operating System	Microsoft Windows7/Windows8 (32-bit or 64-bit) Note: Q Software only supports 64-bit system compatible with 32-bit.
CPU	Intel Pentium IV 3.0 GHZ or higher (4Cores,3.0GHZ are recommended)
Memory	1GB or higher


Network Card	Gigabit Ethernet network card (or higher) are recommended
Display Resolution	1024*768 or higher (QVIEWER)
HDD	1TB or higher (Recorder)

Standalone deployment

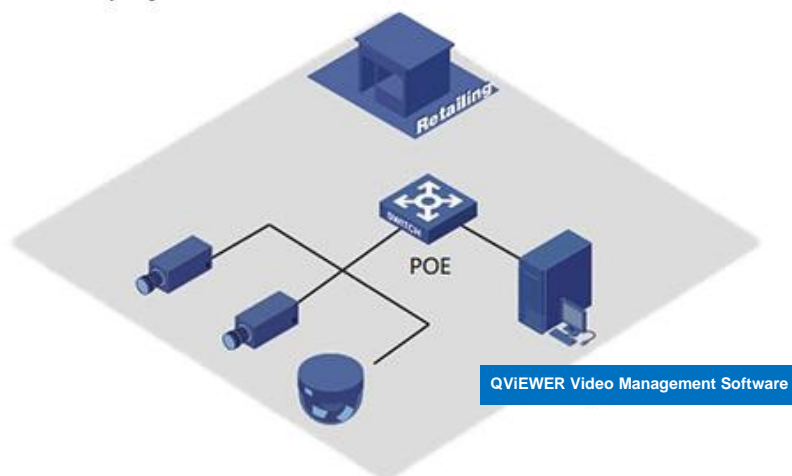

Small-scale video surveillance solution

Multi-computer deployment

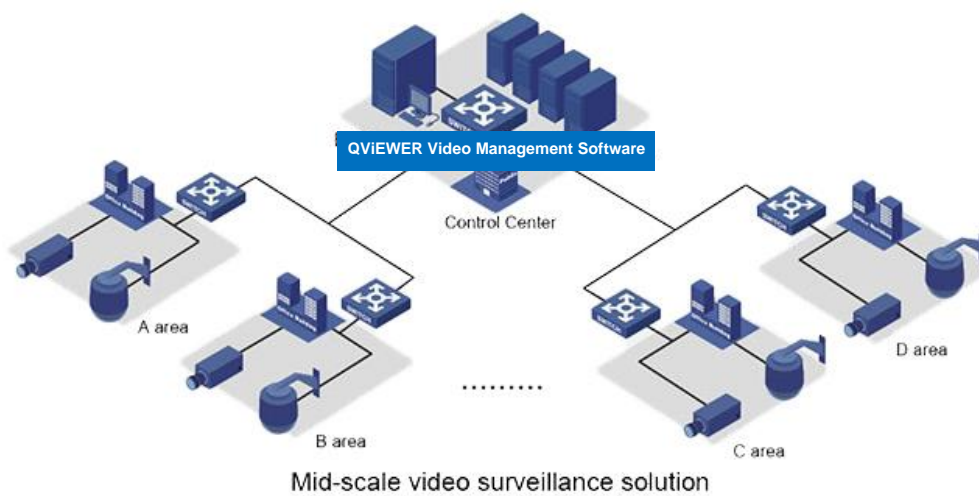

Mid-scale video surveillance solution

